

Hand pallet truck **LEC2300P™**



The perfect basis for all transport systems

The Lift-Rite hand pallet truck is the perfect basis for all transport systems involving palletized goods and materials. Versatile, convenient and reliable, it does its job well in every environment. With its high quality and reliability, Lift-Rite offers many years of problem-free pallet handling. Excellent ergonomic properties guarantee safe, user-friendly handling.

LEC2300P™ has a repertoire of options to enhance capacity, comfort and safety. These include Power-Start-Technology, Quick-Lift, Hand brake and a range of specially adapted steering wheels.

Hand pallet truck **LEC2300P™**



Bushings, grease bushings and ground axes for high performance in the long term.



Rugged, robust pump for high reliability.

Power-Start-Technology

Lift-Rite PST 5000™, Power-Start Technology, reduces inertial resistance to a minimum. One simple manual operation – pumping the towbar up or down – and the truck can be manoeuvred in any direction. Even with its maximum load of 2300 kg.




The built-in PST™ function in Lift-Rite PST 5000™ helps reduce the starting resistance to a minimum. The critical sector, which corresponds to one third of the wheel periphery, is in effect eliminated.

Benefits and features:

- Easy to steer and manoeuvre because of 180° steering angle.
- Easy to pump because of high quality and design.
- Easy pallet entry thanks to rounded fork tips and front climber wheels.
- Easy to handle because of low weight.
- Reliable and robust fork frame made of high strength steel.

Technical Details LEC2300P™

Capacity	_____	2300 kg
Pump strokes to full height	_____	12
Truck weight	_____	75 kg
Width across forks	_____	520/685 mm
Fork length	_____	800/910/1000/1070/ 1150/1220 mm
Min fork height	_____	85 mm
Max lifting height	_____	200 mm

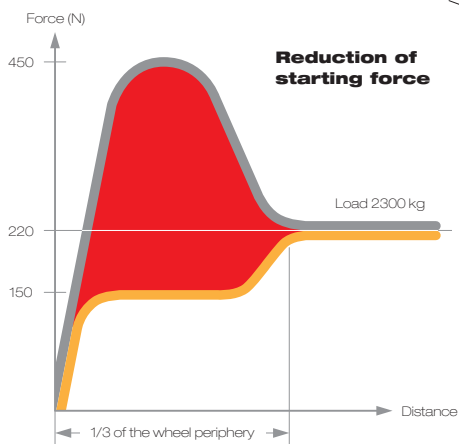

- With PST™
- Without PST™
- Reduction of starting force.



Travel direction is selected via an adjusting handgrip on the towbar. Squeeze the handgrip, pump the towbar and the truck will be launched in the walking direction. When the handgrip is pressed downward, and the towbar raised, the truck will be launched in the direction of the forks.

Quick-Lift

A valuable function for saving time and labour. Perfect for repetitive loading and discharging. One pumping manoeuvre to make contact with the pallet, a second pump to lift the pallet load to its travel position. This function deactivates automatically when the pallet load exceeds 150 kg.

Hand brake

Enables a greater safety margin when parked and during travel. Smooth, synchronised braking force is applied to both steering wheels. Stable locking function for secure parking.

Wheel alternatives

LEC2300™ can be equipped with adapted wheels for any specific application and working environment.

- Nylon
- Polyurethane
- Rubber
- Powerthane
- Steel

